


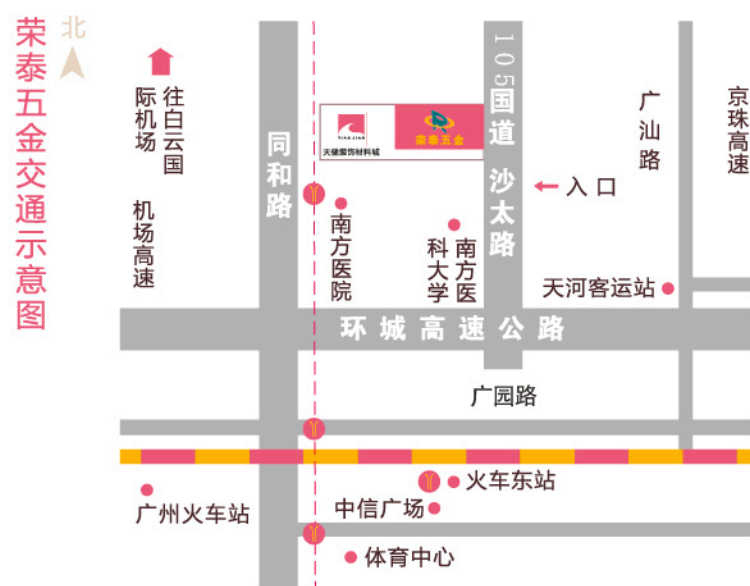

德国总部: 德国荣易科技集团有限公司

地址: 德国杜塞尔多夫市克雷费尔德街19号
 邮箱/E-mail: awen@rtwj.com 邮编/Zip Code: 40549
 网址/Website: www.roeasy.de / www.roeasy.hk

GERMANY ROEASY TECHNOLOGY GROUP LIMITED

Adds: Krefelder Str.19,40549 Duesseldorf Germany.

中国区运营总公司: 广东荣宇泰企业管理有限公司

地址: 广州市白云区沙太路283号天健广场A1201-04
 电话/Tel: 020-36756028 传真/Fax: 020-36756028
 邮箱/E-mail: xgp@rtwj.com 网址/Website: www.ro-easy.com

GUANGDONG RONGYUTAI ENTERPRISE INC.

Adds: Room A1201-04, Tianjian International Decoration Plaza,
 No.283, Shatai Road, Guangzhou, China.

中国区独家代理公司: 广州市荣泰五金制品有限公司

地址: 广州市白云区蟪蜎东路4号(天健广场入口右侧荣泰五金广东总部)2栋
 电话/Tel: 0086-20-87046681 87046683 传真/Fax: 0086-20-87046682
 邮箱/E-mail: info@cnrongtai.com
 网址/Website: www.rt-hardware.com / www.rt-hardware.net

GUANGZHOU RONGTAI HARDWARE PRODUCTS LIMITED

Adds: No.4 East Chanchushi Rd., Baiyun District, Guangzhou, China.
 (On the Right from the Tianjian Squire Main Entrance,
 Guangdong Headquarters of Rongtai Hardware)

生产基地: 广东省汕头市荣易金属塑胶制品厂

工厂地址: 广东省汕头市澄海区东里镇塘西工业区尾巷1号
 电话/Tel: 0086-754-85751190 传真/Fax: 0086-754-85752879


SHANTOU ROEASY HARDWARE PLASTIC PRODUCTS FACTORY

Factory Address: No.1, East Side, Tangxi Industrial Zone, Dongli,
 Chenghai, Shantou, Guangdong, China.

荣易
 ROEASY ISO9001:2000 認證企業



名曰騰浩 [佛山] TEL:13923140158

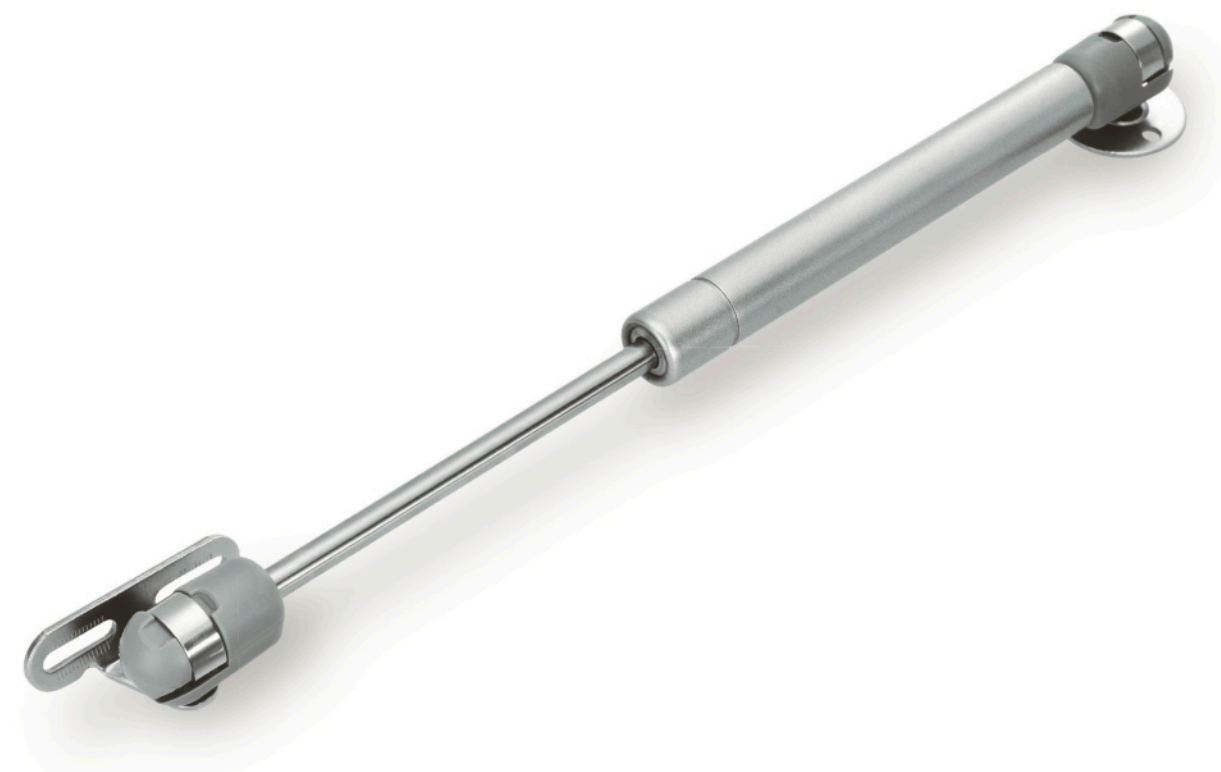

Furniture & Cabinet Support
 Cabinet Support Manufacturer

SUPPORT

气撑产品画册

荣易 ROEASY





Hongkong Rongtai Hardware(Group) Co.,Ltd,(short as Rongtai Group) was established in 1990. Rongtai Group is a modern enterprise which's combining: manufacturing ; technique; trading and service. Also owned the world wide famous brands: ROEASY,Ronglisi, Kaili, Kechuang, Hequn, Meking, TDS,Suogu, etc.

In 2015 RONGTAI Group established a new brand ROEASY, it is for global marketing. With the management approach of Quality first and Customer foremost , there was already a complete set of normalization, scientific and standardization quality management measures and quality control system. We believe ROEASY can offer more professionnal, more sientific and more humanistic products for our life!

ROEASY—針對每款上翻門都有一個合理的解決方案
ROEASY滿足了您對時尚上翻門五金的需求。精湛的技術使安裝和調節輕而易舉。相信您的客戶一定會為其高度舒適的操作着迷。

ROEASY---For every turn-up cabinet door, all have a reasonable solution.
ROEASY meets your requirement for the fashion turn-up cabinet door hardware.
High skilled technology makes the installation easy and adjustment simple.
Believe your clients will crazy for its comfortable operation

輕柔順滑的關閉皆因內置**ROEASY**阻尼技術的存在
借助**ROEASY**快裝技術實現快速簡單的安裝和拆卸
面板可三維調節，簡單方便

Smooth closing depends on the existence of the ROEASY damping,
It can be installed fast and simple with the ROEASY quick assembly technology
Three dimensional adjustment simple and convenient.

無極懸停—面板可在每個理想位置任意停頓
把手位置適合人性化操作
無突出配件 安全可靠

Free angle stay---Panel can stay at any angle
The handle position is suitable for human operation
No prominent parts safe and reliable

Contents

目錄

支撐器系列

Pneumatic Stay Series



01	Pneumatic Stay FD-C01 氣壓支撐器(膠頭)	07	Pneumatic Stay FD-C08 氣壓支撐器(膠頭)
02	Pneumatic Stay FD-C02 氣壓支撐器(鐵頭)	08	Pneumatic Stay FD-C16 氣壓支撐器(帶防塵套)
03	Pneumatic Stay FD-C03 氣壓支撐器(大鐵頭)	09	Pneumatic Stay (Down lifting) FD-C08 氣壓支撐器(下翻)
04	Pneumatic Stay FD-C04 氣壓支撐器(全膠頭)	10	Heavy-duty Pneumatic Stay FD-C20 重型氣壓支撐器
05	Pneumatic Stay FD-C05 氣壓支撐器(膠頭)	11	Gas support for bed FD-C22 床架
06	Pneumatic Stay FD-C11 氣壓支撐器(膠頭)		

隨意停系列

Flap Stay Series



12	Flap Stay FD-B01 任意停支撐	17	Hydraulic Cabinet Hinge(Zinc alloy rod) FD-B06 液壓支撐(鋅合金杆)
13	Flap Stay FD-B03 任意停支撐	18	Hydraulic Cabinet Hinge(Iron rod) FD-B07 液壓支撐(鐵杆)
14	Flap Stay FD-B03-360° 任意停支撐	19	Hydraulic Cabinet Hinge FD-B09 阻尼支撐
15	Flap Stay FD-B04 任意停支撐	20	Flap stay FD-B10 隨意停支撐
16	Flap Stay(Heavy duty) FD-B05 任意停支撐(重型)		

櫥櫃支撐系統

Cabinet Support System



21	Lift-up Flap Support FD-G10 氣動垂直上翻支撐	30	Pocket Door System FD-G50 上翻外推門系統
22	Lift-up Flap Support FD-G20 氣動上翻支撐	31	Cabinet Support Series 櫥櫃支撐系列
23	Lift-up Flap Support FD-G21 氣動斜開支撐	32	Cabinet Support Series 櫥櫃支撐系列
24	Lift-up Flap Support FD-G30 氣動折疊上翻門支撐	33	Heavy-Duty Hydraulic Stay FD-G110 重型液壓支撐器
25	Bi-fold Lift System FD-G60 氣動折疊上翻支撐	34	Multifunctional Flap Support(Down Lifting) FD-G111 多功能機械支撐杆
26	Bi-fold Lift System FD-G70 氣動垂直上翻支撐	35	Multifunctional Flap Support(Down Lifting) FD-G112 多功能機械支撐杆
27	Bi-fold Lift System FD-G80-U 氣動垂直上翻支撐	36	Multifunctional Flap Support(Down Lifting) FD-G113 多功能機械支撐杆
28	Bi-fold Lift System FD-G81-D 氣動垂直下翻支撐	37	Multifunctional Flap Support 多功能機械支撐杆
29	Pocket Door System FD-G40 上翻內藏門系統	38	Multifunctional Flap Support 多功能機械支撐杆



Installation technological information

安裝技術信息



- Easy to assemble:**
- Fix the cabinet bracket and the door bracket with countersunk screws-clip the covers
 - Press the bottom holder onto the cabinet bracket
 - Press the top holder onto the door bracket
 - For removal,lift the cover on the holder and pull the steel pins-the holder are now free
 - Adjust the position of the door by turning the body of the damper

簡易安裝：
通過沉頭螺絲釘進蓋子固定櫃支架和門支架
然后把底部支撐件按進櫃支架
再把最頂端的支撐件按進門支架
拆卸時，提起支撐件上的蓋子并拉出鐵杆，支撐件便可拆除
通過轉動阻尼的殼調節門的位置

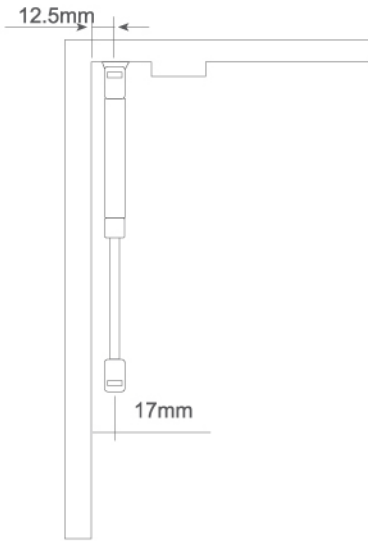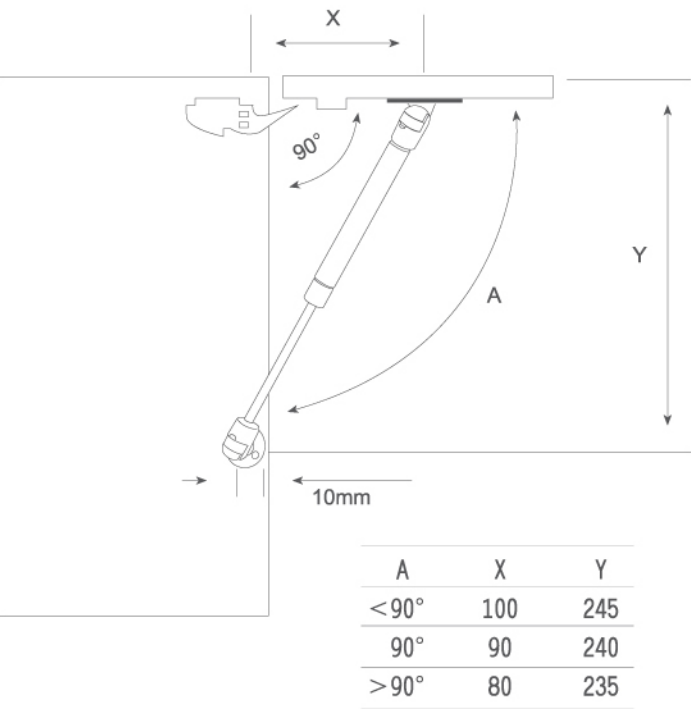

Installation technological information

安裝技術信息

Aero Wing is all-round universal lifter with full adjustability for all sizes of doors and three different ways of working. Combined with Slow Motion hinges, it confers a perfect movement to the door.



飛機翼是全面通用適用性能升降裝置，適用所有尺寸的門和帶有三個不同的運作方式結合緩衝鉸鏈的使用，它帶來一個完美的運動到門口

Aero Lift is the entry level solution in the lifter world.Simple to use and to install,the product is reliable and gives good results on small and large doors.In combination with Touch-open mechanism fixed on the cabinet,the product can be used without handle.


飛機升降是升降裝置界的初級入門。
簡易使用，安裝，可靠，與小門，大門使用上起到良好的效果與安裝在櫃子上的反彈裝置使用，產品可以單獨使用，無需拉手

Applications:
應用：
Up solution
向上方式

A	X	Y
<90°	100	245
90°	90	240
>90°	80	235

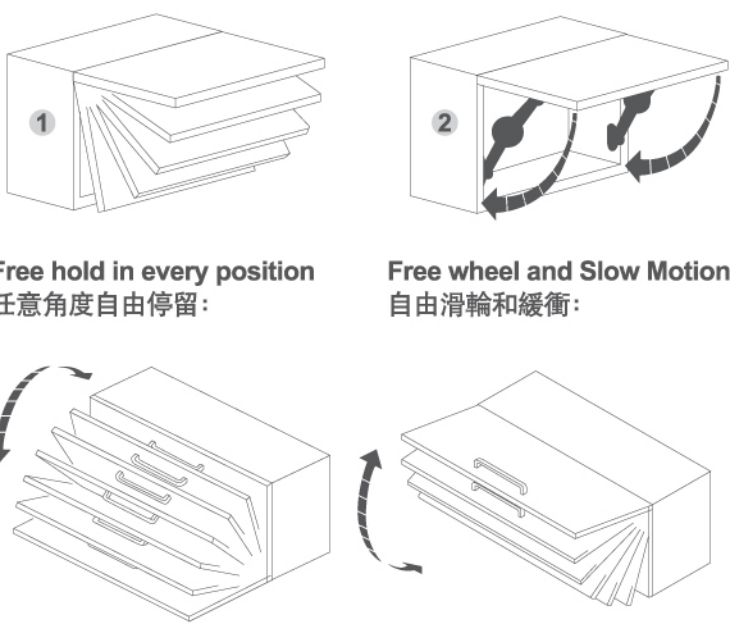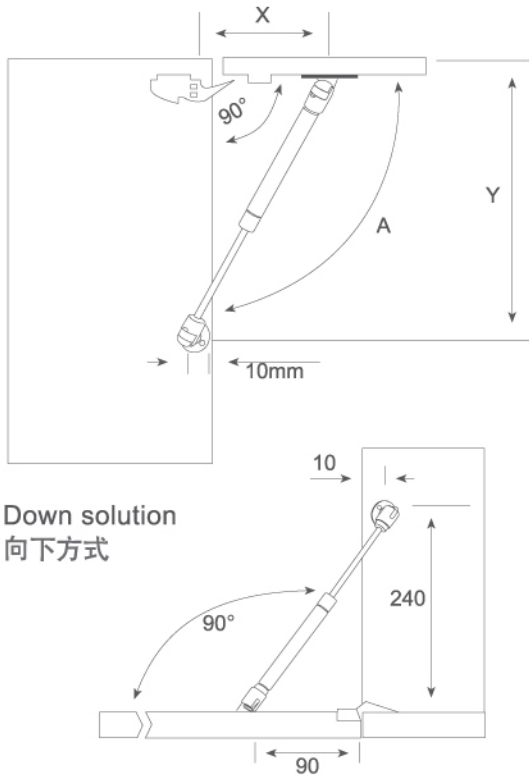

Drilling holes for the Lift mechanism:
提升裝置的鑽孔：

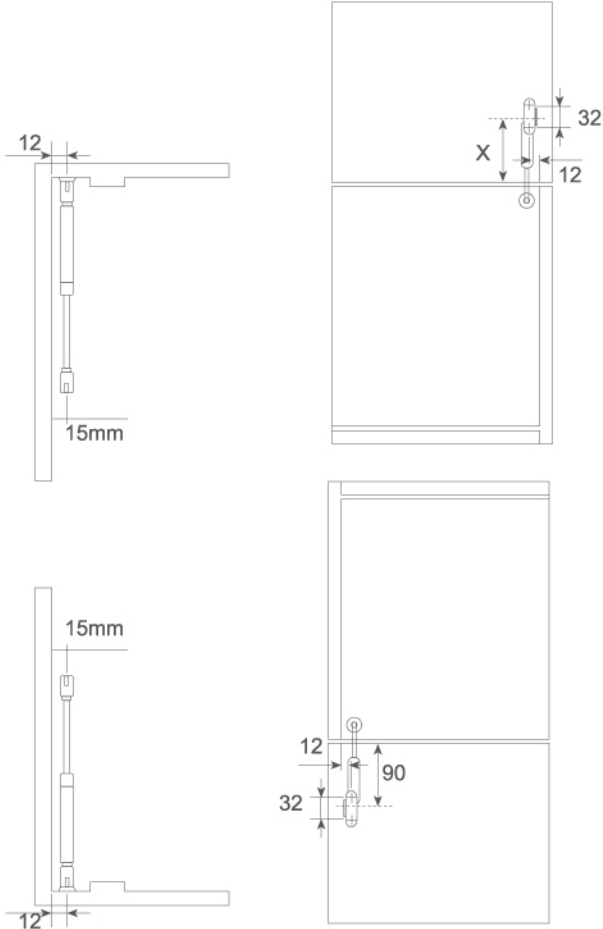

荣易 ROE'ASY Pneumatic Stay FD-C01 氣壓支撐器(膠頭)



标准配件:
Standard accessories:

可選配件:
Optional accessories:

Pneumatic Stay
Material: Iron+Plastic damping or Copper + Plastic damping
Finish: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of gas spring--6" 8" 10" 12"
The dimensions of pipe: 15x1.0mm;The dia.of rod: 6.0mm
International advanced spray-paint technology
Weight-lifting is 50N,60N,80N,100N,120N,150N,180N,200N,250N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel


氣壓支撐器(膠頭)
主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度—6" 8" 10" 12"
氣管尺寸: 15x1.0mm; 杆直徑: 6.0mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有50N,60N,80N,100N,120N,150N,180N,200N,250N
氣撐承受力度可根據門板重量選購定做。

規格、尺寸、門重選擇表
Selecting table of specification,size and door weight


狀態 Status 門板高度(mm)height 產品型號 Product Type	80°				90°				110°			
	300	400	500	600	300	400	500	600	300	400	500	600
80N	<2.6	<2.2	<1.7	<1.3	<2.4	<2.0	<1.6	<1.2	<2.1	<1.7	<1.4	<1.0
100N	<3.3	<2.7	<2.2	<1.6	<3	<2.5	<2.0	<1.5	<2.6	<2.2	<1.7	<1.3
120N	<4	<3.3	<2.6	<2	<3.6	<3.0	<2.4	<1.8	<3.2	<2.6	<2.1	<1.6

注: 請按此表選擇合適的型號及門的重量, 達到最佳效果。
Note: Please select the appropriate type and the weigh of the door according to the table,so that achieve the best performance.


FD-C01 U	Up lifting 上翻	
FD-C01 D	Down lifting 下翻	
FD-C01 N	Any angle up 任意上翻	



Installation indication 安裝孔位示意圖

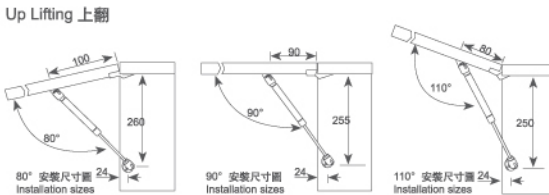

Down Lifting 下翻

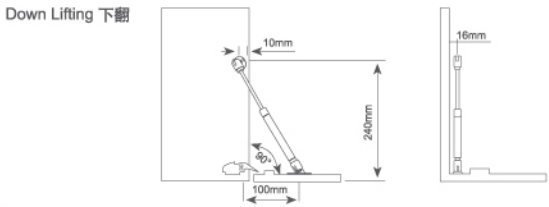

* 以上技術資料基於規格為12"的產品 * The above technical information depends on the size of 12".

荣易 ROE'ASY Pneumatic Stay FD-C02 氣壓支撐器(鐵頭)



标准配件:
Standard accessories:

可選配件:
Optional accessories:

Pneumatic Stay
Material: Iron+Plastic damping or Copper + Plastic damping
Finish: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of gas spring--6" 8" 10" 12"
The dimensions of pipe: 15x1.0mm;The dia.of rod: 6.0mm
International advanced spray-paint technology
Weight-lifting is 50N,60N,80N,100N,120N,150N,180N,200N,250N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel



氣壓支撐器(鐵頭)
主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度—6" 8" 10" 12"
氣管尺寸: 15x1.0mm; 杆直徑: 6.0mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有50N,60N,80N,100N,120N,150N,180N,200N,250N
氣撐承受力度可根據門板重量選購定做。

規格、尺寸、門重選擇表
Selecting table of specification,size and door weight


狀態 Status 門板高度(mm)height 產品型號 Product Type	80°				90°				110°			
	300	400	500	600	300	400	500	600	300	400	500	600
80N	<2.6	<2.2	<1.7	<1.3	<2.4	<2.0	<1.6	<1.2	<2.1	<1.7	<1.4	<1.0
100N	<3.3	<2.7	<2.2	<1.6	<3	<2.5	<2.0	<1.5	<2.6	<2.2	<1.7	<1.3
120N	<4	<3.3	<2.6	<2	<3.6	<3.0	<2.4	<1.8	<3.2	<2.6	<2.1	<1.6

注: 請按此表選擇合適的型號及門的重量, 達到最佳效果。
Note: Please select the appropriate type and the weigh of the door according to the table,so that achieve the best performance.


FD-C02 U	Up lifting 上翻	
FD-C02 D	Down lifting 下翻	
FD-C02 N	Any angle up 任意上翻	



Installation indication 安裝孔位示意圖

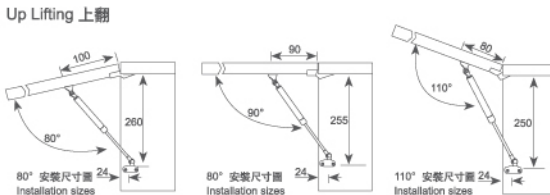

Down Lifting 下翻

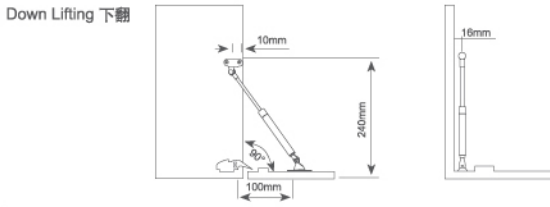

* 以上技術資料基於規格為12"的產品 * The above technical information depends on the size of 12".

荣易
ROEASY


Pneumatic Stay
FD-C03 氣壓支撐器(大鐵頭)



标准配件:
Standard accessories:



可选配件:
Optional accessories:



Pneumatic Stay

Material: Iron+Plastic damping or Copper + Plastic damping
Finsih: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of gas spring--6" 8" 10" 12"
The dimensions of pipe: 15x1.0mm;The dia.of rod: 6.0mm
International advanced spray-paint technology
Weight-lifting is 50N,60N,80N,100N,120N,150N,180N,200N,250N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel

氣壓支撐器(大鐵頭)

主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度—6" 8" 10" 12"
氣管尺寸: 15x1.0mm; 杆直徑: 6.0mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有50N,60N,80N,100N,120N,150N,180N,200N,250N
氣撐承受力度可根據門板重量選購定做。


規格、尺寸、門重選擇表

Selecting table of specification,size and door weight

產品型號 Product Type	80°				90°				110°			
	300	400	500	600	300	400	500	600	300	400	500	600
80N	<2.6	<2.2	<1.7	<1.3	<2.4	<2.0	<1.6	<1.2	<2.1	<1.7	<1.4	<1.0
100N	<3.3	<2.7	<2.2	<1.6	<3	<2.5	<2.0	<1.5	<2.6	<2.2	<1.7	<1.3
120N	<4	<3.3	<2.6	<2	<3.6	<3.0	<2.4	<1.8	<3.2	<2.6	<2.1	<1.6


注: 請按此表選擇合適的型號及門的重量, 達到最佳效果。
Note: Please select the appropriate type and the weigh of the door according to the table,so that achieve the best performance.

FD-C03 U	Up lifting 上翻	
FD-C03 D	Down lifting 下翻	
FD-C03 N	Any angle up 任意上翻	




Installation indication 安裝孔位示意圖

Up Lifting 上翻

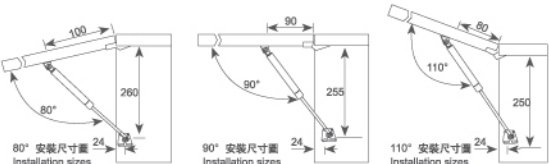

Down Lifting 下翻

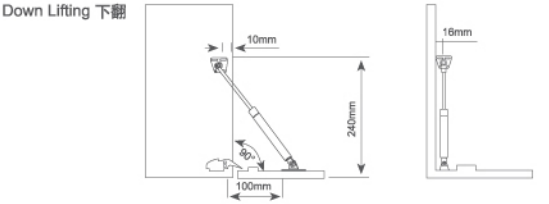

★ 以上技術資料基于規格為10°的產品 ★ The above technical information depends on the size of 10°.

荣易
ROEASY


Pneumatic Stay
FD-C04 氣壓支撐器(全膠頭)



标准配件:
Standard accessories:



可选配件:
Optional accessories:



Pneumatic Stay

Material: Iron+Plastic damping or Copper + Plastic damping
Finsih: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of gas spring--6" 8" 10" 12"
The dimensions of pipe: 15x1.0mm;The dia.of rod: 6.0mm
International advanced spray-paint technology
Weight-lifting is 50N,60N,80N,100N,120N,150N,180N,200N,250N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel

氣壓支撐器(全膠頭)

主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度—6" 8" 10" 12"
氣管尺寸: 15x1.0mm; 杆直徑: 6.0mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有50N,60N,80N,100N,120N,150N,180N,200N,250N
氣撐承受力度可根據門板重量選購定做。


規格、尺寸、門重選擇表

Selecting table of specification,size and door weight

產品型號 Product Type	80°				90°				110°			
	300	400	500	600	300	400	500	600	300	400	500	600
80N	<2.6	<2.2	<1.7	<1.3	<2.4	<2.0	<1.6	<1.2	<2.1	<1.7	<1.4	<1.0
100N	<3.3	<2.7	<2.2	<1.6	<3	<2.5	<2.0	<1.5	<2.6	<2.2	<1.7	<1.3
120N	<4	<3.3	<2.6	<2	<3.6	<3.0	<2.4	<1.8	<3.2	<2.6	<2.1	<1.6


注: 請按此表選擇合適的型號及門的重量, 達到最佳效果。
Note: Please select the appropriate type and the weigh of the door according to the table,so that achieve the best performance.

FD-C04 U	Up lifting 上翻	
FD-C04 D	Down lifting 下翻	
FD-C04 N	Any angle up 任意上翻	




Installation indication 安裝孔位示意圖

Up Lifting 上翻

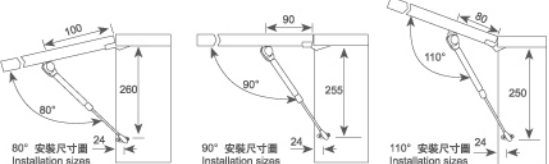

Down Lifting 下翻

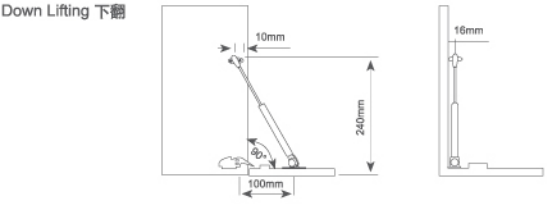

★ 以上技術資料基于規格為10°的產品 ★ The above technical information depends on the size of 10°.

荣易
ROE'ASY
Pneumatic Stay
FD-C05 氣壓支撐器(膠頭)



标准配件:
Standard accessories:



可選配件:
Optional accessories:



Pneumatic Stay

Material: Iron+Plastic damping or Copper + Plastic damping
Finsih: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of gas spring--6" 8" 10" 12"
The dimensions of pipe: 15x1.0mm;The dia.of rod: 6.0mm
International advanced spray-paint technology
Weight-lifting is 50N,60N,80N,100N,120N,150N,180N,200N,250N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel

氣壓支撐器(膠頭)


主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度--6" 8" 10" 12"
氣管尺寸: 15x1.0mm; 杆直徑: 6.0mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N
氣撐承受力度可根據門板重量選購定做。

規格、尺寸、門重選擇表
Selecting table of specification,size and door weight

狀態 Status 門板重量/Door weight 產品型號 Product Type	80°				90°				110°			
	300	400	500	600	300	400	500	600	300	400	500	600
80N	<2.6	<2.2	<1.7	<1.3	<2.4	<2.0	<1.6	<1.2	<2.1	<1.7	<1.4	<1.0
100N	<3.3	<2.7	<2.2	<1.6	<3	<2.5	<2.0	<1.5	<2.6	<2.2	<1.7	<1.3
120N	<4	<3.3	<2.6	<2	<3.6	<3.0	<2.4	<1.8	<3.2	<2.6	<2.1	<1.6


注: 請按此表選擇合適的型號及門的重量, 達到最佳效果。
Note: Please select the appropriate type and the weigh of the door according to the table,so that achieve the best performance.

FD-C05 U	Up lifting 上翻	
FD-C05 D	Down lifting 下翻	
FD-C05 N	Any angle up 任意上翻	




Installation indication 安裝孔位示意圖

Up Lifting 上翻

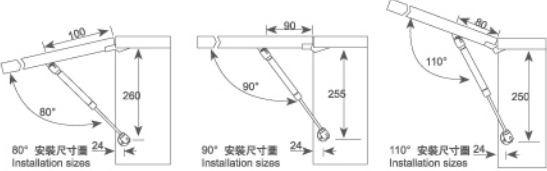

Down Lifting 下翻

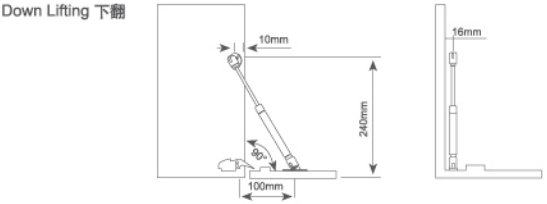

* 以上技術資料基于規格為10°的產品 * The above technical information depends on the size of 10°.

荣易
ROE'ASY
Pneumatic Stay
FD-C11 氣壓支撐器(膠頭)



标准配件:
Standard accessories:



可選配件:
Optional accessories:



Pneumatic Stay

Material: Iron+Plastic damping or Copper + Plastic damping
Finsih: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of gas spring--6" 8" 10" 12"
The dimensions of pipe: 15x1.0mm;The dia.of rod: 6.0mm
International advanced spray-paint technology
Weight-lifting is 50N,60N,80N,100N,120N,150N,180N,200N,250N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel

氣壓支撐器(膠頭)


主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度--6" 8" 10" 12"
氣管尺寸: 15x1.0mm; 杆直徑: 6.0mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N
氣撐承受力度可根據門板重量選購定做。

規格、尺寸、門重選擇表
Selectiong table of specification,size and door weight

狀態 Status 門板重量/Door weight 產品型號 Product Type	80°				90°				110°			
	300	400	500	600	300	400	500	600	300	400	500	600
80N	<2.6	<2.2	<1.7	<1.3	<2.4	<2.0	<1.6	<1.2	<2.1	<1.7	<1.4	<1.0
100N	<3.3	<2.7	<2.2	<1.6	<3	<2.5	<2.0	<1.5	<2.6	<2.2	<1.7	<1.3
120N	<4	<3.3	<2.6	<2	<3.6	<3.0	<2.4	<1.8	<3.2	<2.6	<2.1	<1.6


注: 請按此表選擇合適的型號及門的重量, 達到最佳效果。
Note: Please select the appropriate type and the weigh of the door according to the table,so that achieve the best performance.

FD-C11 U	Up lifting 上翻	
FD-C11 D	Down lifting 下翻	
FD-C11 N	Any angle up 任意上翻	




Installation indication 安裝孔位示意圖

Up Lifting 上翻

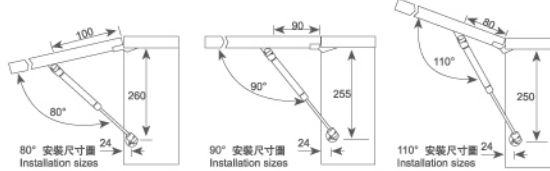

Down Lifting 下翻

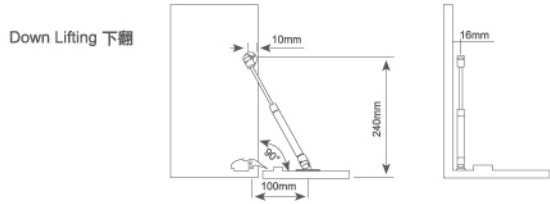

* 以上技術資料基于規格為10°的產品 * The above technical information depends on the size of 10°.

荣易 ROEASY Pneumatic Stay FD-C08 氣壓支撐器(膠頭)



Pneumatic Stay
Material: Iron+Plastic damping or Copper + Plastic damping
Finsih: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of gas spring--6" 8" 10" 12"
The dimensions of pipe: 15x1.0mm;The dia.of rod: 6.0mm
International advanced spray-paint technology
Weight-lifting is 50N,60N,80N,100N,120N,150N,180N,200N,250N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel


氣壓支撐器(膠頭)
主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度—6" 8" 10" 12"
氣管尺寸: 15x1.0mm; 杆直徑: 6.0mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有50N,60N,80N,100N,120N,150N,180N,200N,250N
氣撐承受力度可根據門板重量選購定做。

規格、尺寸、門重選擇表
Selecting table of specification,size and door weight

狀態 Status 門板重量(mm)weight 產品型號 Product Type	80°				90°				110°			
	300	400	500	600	300	400	500	600	300	400	500	600
80N	<2.6	<2.2	<1.7	<1.3	<2.4	<2.0	<1.6	<1.2	<2.1	<1.7	<1.4	<1.0
100N	<3.3	<2.7	<2.2	<1.6	<3	<2.5	<2.0	<1.5	<2.6	<2.2	<1.7	<1.3
120N	<4	<3.3	<2.6	<2	<3.6	<3.0	<2.4	<1.8	<3.2	<2.6	<2.1	<1.6


注: 請按此表選擇合適的型號及門的重量, 達到最佳效果。
Note: Please select the appropriate type and the weigh of the door according to the table,so that achieve the best performance.

FD-C08 U	Up lifting 上翻	
FD-C08 D	Down lifting 下翻	
FD-C08 N	Any angle up 任意上翻	




Installation indication 安裝孔位示意圖

Up Lifting 上翻

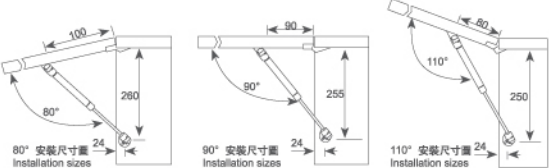

Down Lifting 下翻

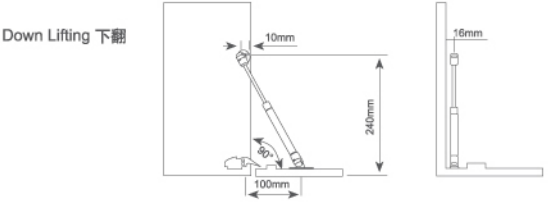

* 以上技術資料基于規格為10°的產品 * The above technical information depends on the size of 10°.

荣易 ROEASY Pneumatic Stay FD-C16 氣壓支撐器(帶防塵套)



Pneumatic Stay
Material: Iron+Plastic damping or Copper + Plastic damping
Finsih: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of gas spring--6" 8" 10" 12"
The dimensions of pipe: 15x1.0mm;The dia.of rod: 6.0mm
International advanced spray-paint technology
Weight-lifting is 50N,60N,80N,100N,120N,150N,180N,200N,250N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel

氣壓支撐器(帶防塵套)
主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度—6" 8" 10" 12"
氣管尺寸: 15x1.0mm; 杆直徑: 6.0mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有50N,60N,80N,100N,120N,150N,180N,200N,250N
氣撐承受力度可根據門板重量選購定做。

規格、尺寸、門重選擇表
Selecting table of specification,size and door weight

狀態 Status 門板重量(mm)weight 產品型號 Product Type	80°				90°				110°			
	300	400	500	600	300	400	500	600	300	400	500	600
80N	<2.6	<2.2	<1.7	<1.3	<2.4	<2.0	<1.6	<1.2	<2.1	<1.7	<1.4	<1.0
100N	<3.3	<2.7	<2.2	<1.6	<3	<2.5	<2.0	<1.5	<2.6	<2.2	<1.7	<1.3
120N	<4	<3.3	<2.6	<2	<3.6	<3.0	<2.4	<1.8	<3.2	<2.6	<2.1	<1.6


注: 請按此表選擇合適的型號及門的重量, 達到最佳效果。
Note: Please select the appropriate type and the weigh of the door according to the table,so that achieve the best performance.

FD-C16 U	Up lifting 上翻	
FD-C16 D	Down lifting 下翻	
FD-C16 N	Any angle up 任意上翻	




Installation indication 安裝孔位示意圖

Up Lifting 上翻

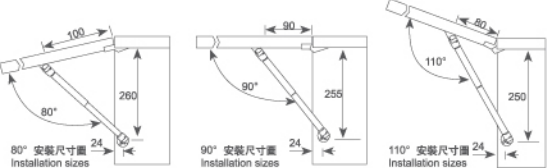

Down Lifting 下翻

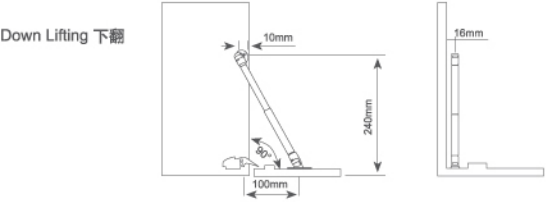

* 以上技術資料基于規格為10°的產品 * The above technical information depends on the size of 10°.

Pneumatic Stay (Down lifting)
FD-C08 氣壓支撐器(下翻)



Pneumatic Stay

Material: Iron+Plastic damping or Copper + Plastic damping
Finsih: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of gas spring—6" 8" 10" 12"
The dimensions of pipe: 15x1.0mm;The dia.of rod: 6.0mm
International advanced spray-paint technology
Weight-lifting is 50N,60N,80N,100N,120N,150N,180N,200N,250N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel

氣壓支撐器(膠頭)

主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度—6" 8" 10" 12"
氣管尺寸: 15x1.0mm; 杆直徑: 6.0mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有50N,60N,80N,100N,120N,150N,180N,200N,250N
氣撐承受力度可根據門板重量選購定做。

規格、尺寸、門重選擇表

Selecting table of specification,size and door weight

狀態 Status 門板重量(kg)weight 產品型號 Product Type	80°				90°				110°			
	300	400	500	600	300	400	500	600	300	400	500	600
80N	<2.6	<2.2	<1.7	<1.3	<2.4	<2.0	<1.6	<1.2	<2.1	<1.7	<1.4	<1.0
100N	<3.3	<2.7	<2.2	<1.6	<3	<2.5	<2.0	<1.5	<2.6	<2.2	<1.7	<1.3
120N	<4	<3.3	<2.6	<2	<3.6	<3.0	<2.4	<1.8	<3.2	<2.6	<2.1	<1.6


注: 請按此表選擇合適的型號及門的重量, 達到最佳效果。
Note: Please select the appropriate type and the weigh of the door according to the table,so that achieve the best performance.

FD-C08 D Down lifting 下翻



Installation indication 安裝孔位示意圖

Down Lifting 下翻

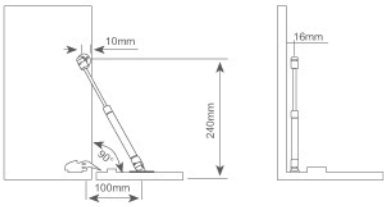

★ 以上技術資料基于規格為10"的產品 ★ The above technical information depends on the size of 10".

Heavy-duty Pneumatic Stay
FD-C20 重型氣壓支撐器




Heavy-duty Pneumatic Stay

Material: Iron+Plastic damping or Copper + Plastic damping
Finsih: Silver grey
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: The length of Pneumatic Stay—6" 8" 10" 12" 14" 16" 18" 20" 24" 30"
The dimensions of pipe: 18x1.2/22x1.5mm;The dia.of rod: 8/10mm
International advanced spray-paint technology
Weight-lifting is 200N-1500N
High density zinc alloy cast part
Different pneumatic can be ordered for different weight of door panel

重型氣壓支撐器


主要材質: 鐵+阻尼塑膠或銅+阻尼塑膠
表面處理: 銀灰色
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 氣撐長度—6" 8" 10" 12" 14" 16" 18" 20" 24" 30"
氣管尺寸: 18X1.2mm, 杆直徑: 8.0mm, 或22X1.5mm, 杆直徑: 10mm
采用國際先進噴塗技術, 無毒環保, 有效防止腐蝕及生銹
舉力規格有200N-1500N
氣撐承受力度可根據門板重量選購定做。

FD-C20 Up lifting 上翻

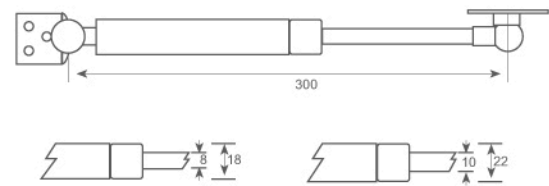

Installation indication 安裝孔位示意圖

Up Lifting 上翻

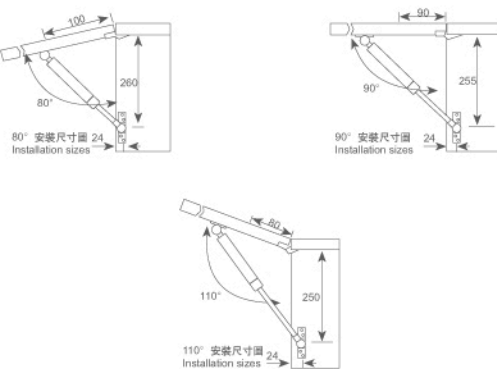

★ 以上技術資料基于規格為12"的產品 ★ The above technical information depends on the size of 12".

荣易
ROEASY

Gas support for bed
FD-C22 床架



Heavy bed hold

Material: Hot plate
Finsih: After cleaning powder
Load capacity: 200kg
Size: 615mm-1500mm

重型床撑

主要材質：熱板
表面處理：除銹后噴粉
承受能力：200Kg
規 格：615mm-1500mm



FD-C22-615mm	Up lifting 上翻	
FD-C22-900mm	Up lifting 上翻	
FD-C22-1000mm	Up lifting 上翻	
FD-C22-1200mm	Up lifting 上翻	
FD-C22-1500mm	Up lifting 上翻	

荣易
ROEASY

Flap Stay
FD-B01 任意停支撑



Flap stay

Material: Zinc alloy
Finsih: Nickel plated;Chrome plated
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Made in accordance with European DIN industrial standards
Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Product core part uses steel roller and rolling bearing
The service life is 3.5-4 times as common structures


任意停支撑

主要材質：鋅合金
表面處理：鍍鎳、鍍鉻
適用範圍：櫥櫃的上翻木門和鋁框門
主要功能：支撐櫥櫃門板
產品特性：按歐洲DIN工業標準生產
高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
采用鋼質圓柱滾輪滾動軸承
使用壽命是國內普通結構3.5-4倍


蓋重量 Lid Weight	1kg (300x300x15)			2kg (450x300x15)			3kg (550x500x15)			4kg (600x500x15)			5kg (750x500x18)			6kg (750x600x18)			7kg (850x700x18)		
開啓角度 Opening Angle	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°
蓋高度 Lid Height (cm)	30	1	1	1	1	1	1	1	1	1	1	1	1	2	1	2	2	2	2	2	2
40	1	1	1	1	1	1	1	1	1	1	2	1	2	2	2	2	2	2	2	2	-
50	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	-	2	-	-	-
60	1	1	1	1	1	2	2	2	2	2	2	2	2	2	-	2	-	2	-	-	-
70	1	1	2	1	2	2	2	2	2	2	-	-	-	-	-	-	-	2	-	-	-

頂蓋數保持 Number of Lid Stays

FD-B01 Flap Stay 任意停支撑

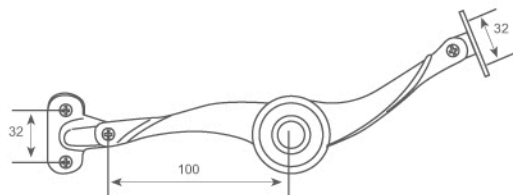

Installation indication 安裝孔位示意圖

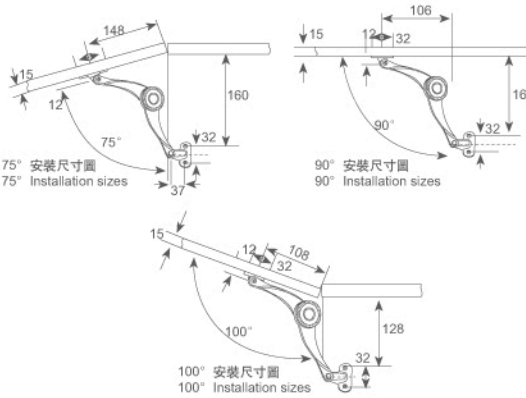

荣易
ROEASY

Flap Stay
FD-B03 任意停支撑



Flap stay


Material: Zinc alloy
Finsih: Nickel plated;Chrome plated
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Made in accordance with European DIN industrial standards
Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Product core part uses steel roller and rolling bearing
The service life is 3.5-4 times as common structures

任意停支撑
主要材質：鋅合金
表面處理：鍍鎳、鍍鉻
適用範圍：櫥櫃的上翻木門和鋁框門
主要功能：支撐櫥櫃門板
產品特性：按歐洲DIN工業標準生產
高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
采用鋼質圓柱滾輪滾動軸承
使用壽命是國內普通結構3.5-4倍


蓋重量 Lid Weight	1kg			2kg			3kg			4kg			5kg			6kg			7kg		
	(300x300x15)			(450x300x15)			(550x500x15)			(600x500x18)			(750x500x18)			(750x600x18)			(850x700x18)		
開啓角度 Opening Angle	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°
蓋高度 Lid Height (cm)	30	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2
40	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2
50	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	-
60	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	-
70	1	1	2	1	1	2	2	2	2	2	2	2	2	2	2	2	-	-	2	2	-

頂蓋數保持 Number of Lid Stays

FD-B03 Flap Stay 任意停支撑

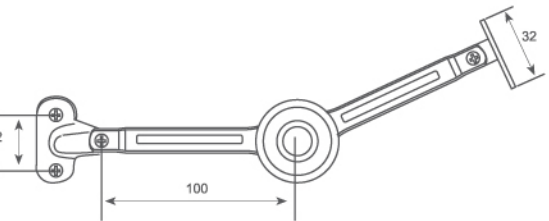

Installation indication 安裝孔位示意圖

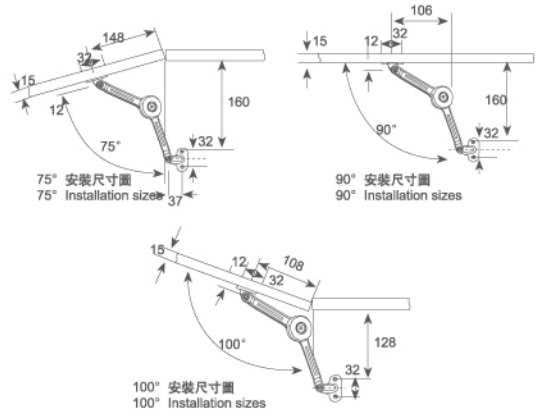

荣易
ROEASY

Flap Stay
FD-B03-360° 任意停支撑



Flap stay


Material: Zinc alloy
Finsih: Nickel plated;Chrome plated
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Made in accordance with European DIN industrial standards
Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Product core part uses steel roller and rolling bearing
The service life is 3.5-4 times as common structures

任意停支撑
主要材質：鋅合金
表面處理：鍍鎳、鍍鉻
適用範圍：櫥櫃的上翻木門和鋁框門
主要功能：支撐櫥櫃門板
產品特性：按歐洲DIN工業標準生產
高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
采用鋼質圓柱滾輪滾動軸承
使用壽命是國內普通結構3.5-4倍


蓋重量 Lid Weight	1kg			2kg			3kg			4kg			5kg			6kg			7kg		
	(300x300x15)			(450x300x15)			(550x500x15)			(600x500x18)			(750x500x18)			(750x600x18)			(850x700x18)		
開啓角度 Opening Angle	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°
蓋高度 Lid Height (cm)	30	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2
40	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2
50	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	-
60	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	-
70	1	1	2	1	1	2	2	2	2	2	2	2	2	2	2	2	-	-	2	2	-

頂蓋數保持 Number of Lid Stays

FD-B03-360° Flap Stay 任意停支撑

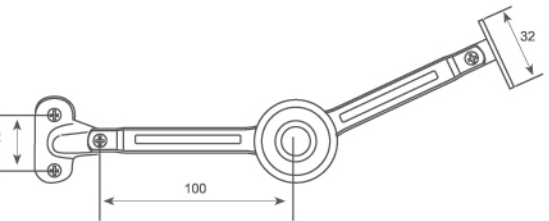

Installation indication 安裝孔位示意圖

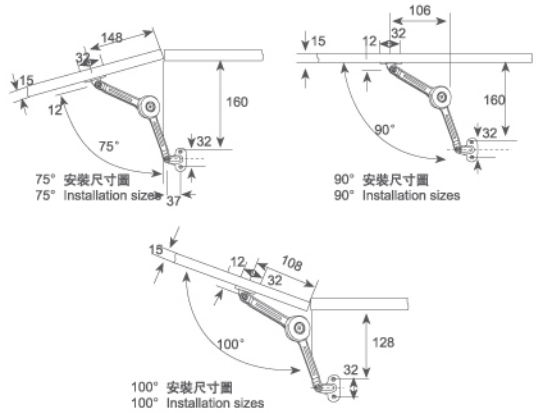

荣易
ROEASY

Flap Stay
FD-B04 任意停支撑




Flap stay

Material: Zinc alloy
Finsih: Nickel plated;Chrome plated
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Made in accordance with European DIN industrial standards
Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Product core part uses steel roller and rolling bearing
The service life is 3.5-4 times as common structures

任意停支撑
主要材質：鋅合金
表面處理：鍍鎳、鍍鉻
適用範圍：櫥櫃的上翻木門和鋁框門
主要功能：支撐櫥櫃門板
產品特性：按歐洲DIN工業標準生產
高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
采用鋼質圓柱滾輪滾動軸承
使用壽命是國內普通結構3.5-4倍

蓋重量 Lid Weight	1kg			2kg			3kg			4kg			5kg			6kg			7kg		
	(300x300x15)			(450x300x15)			(550x500x15)			(600x500x15)			(750x500x18)			(750x600x18)			(850x700x18)		
開啓角度 Opening Angle	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°
蓋高度 Lid Height (cm)	30	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2
40	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2
50	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	-	-
60	1	1	1	1	1	2	1	2	2	2	2	2	2	2	-	-	-	2	-	-	-
70	1	1	2	1	2	2	2	2	2	2	-	-	2	-	-	-	-	2	-	-	-

頂蓋數保持 Number of Lid Stays

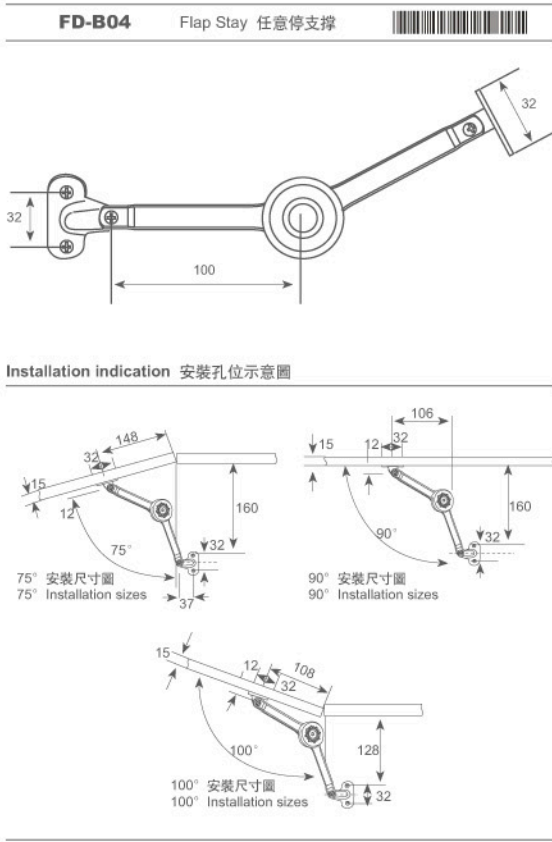

荣易
ROEASY

Flap Stay(Heavy duty)
FD-B05 任意停支撑(重型)




Flap Stay(Heavy duty)

Material: Zinc alloy
Finsih: Nickel plated;Chrome plated
Available for: Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Made in accordance with European DIN industrial standards
Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Product core part uses steel roller and rolling bearing
The service life is 3.5-4 times as common structures

任意停支撑(重型)
主要材質：鋅合金
表面處理：鍍鎳、鍍鉻
適用範圍：櫥櫃的上翻木門和鋁框門
主要功能：支撐櫥櫃門板
產品特性：按歐洲DIN工業標準生產
高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
采用鋼質圓柱滾輪滾動軸承
使用壽命是國內普通結構3.5-4倍

蓋重量 Lid Weight	1kg			2kg			3kg			4kg			5kg			6kg			7kg		
	(300x300x15)			(450x300x15)			(550x500x15)			(600x500x15)			(750x500x18)			(750x600x18)			(850x700x18)		
開啓角度 Opening Angle	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°	75°	90°	110°
蓋高度 Lid Height (cm)	30	1	1	1	1	1	1	1	1	1	1	1	1	1	2	1	2	2	2	2	2
40	1	1	1	1	1	1	1	1	1	1	1	1	1	2	1	2	2	2	2	2	2
50	1	1	1	1	1	1	1	1	1	1	2	1	2	2	2	2	2	2	2	-	-
60	1	1	1	1	1	2	1	2	2	2	2	2	2	2	-	2	-	-	2	-	-
70	1	1	2	1	2	2	2	2	2	2	-	-	2	-	-	2	-	-	2	-	-

頂蓋數保持 Number of Lid Stays

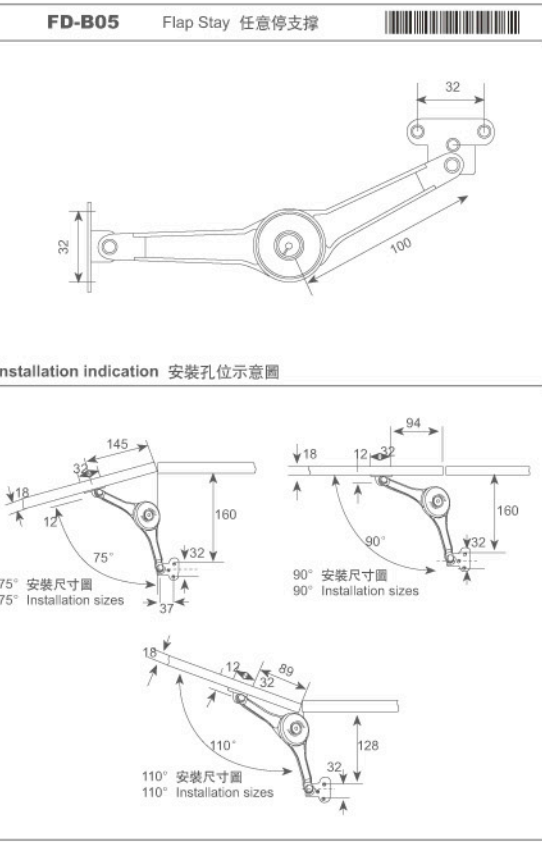



Hydraulic Cabinet Hinge(Zinc alloy rod)

Material: Zinc alloy / Iron

Finish: Nickel; Chrome plated

Available for : Up-turning wooden door and aluminum-frame door

Function: Supporting cabinet doors

Features: Hi-tech processing technology and surface electroplating

High density zinc alloy cast part

Hi-tech hydraulic make it silent on travelling

FD-B06-U

Up lifting 上翻



FD-B06-D

Down lifting 下翻



液壓支撐(鋅合金杆)

主要材質: 鋅合金/鐵

表面處理: 鍍鎳、鍍鉻


適用範圍: 櫥櫃的上翻木門和鋁框門

主要功能: 支撐櫥櫃門板


產品特性: 高密度鋅合金壓鑄成形

高技術的電鍍并經封閉的表面處理

高技術油壓真空處理技術, 行程靜音



Installation indication 安裝孔位示意圖

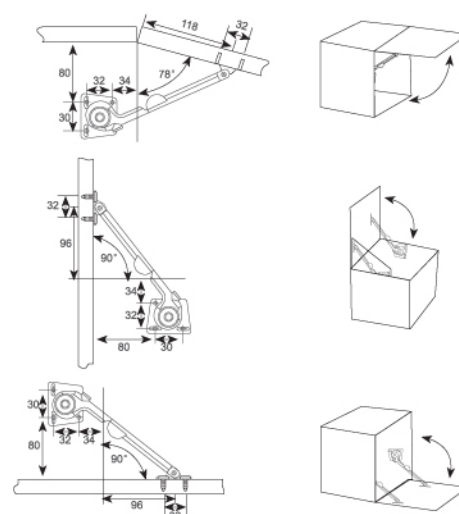

Hydraulic Cabinet Hinge(Iron rod)

Material: Zinc alloy / Iron

Finish: Nickel; Chrome plated

Available for : Up-turning wooden door and aluminum-frame door

Function: Supporting cabinet doors

Features: Hi-tech processing technology and surface electroplating

High density zinc alloy cast part

Hi-tech hydraulic make it silent on travelling

FD-B07-U

Up lifting 上翻



FD-B07-D

Down lifting 下翻



液壓支撐(鐵杆)

主要材質: 鋅合金/鐵

表面處理: 鍍鎳、鍍鉻


適用範圍: 櫥櫃的上翻木門和鋁框門

主要功能: 支撐櫥櫃門板


產品特性: 高密度鋅合金壓鑄成形

高技術的電鍍并經封閉的表面處理

高技術油壓真空處理技術, 行程靜音



Installation indication 安裝孔位示意圖

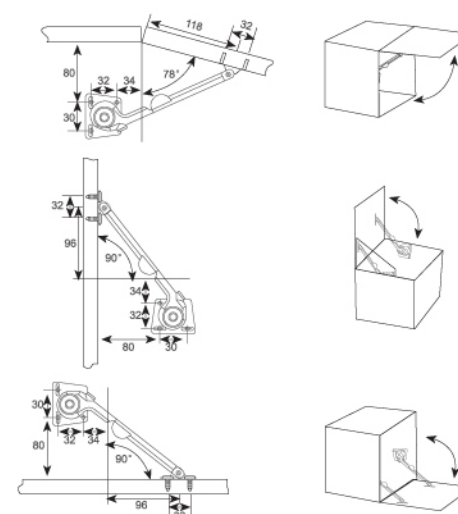



Hydraulic Cabinet Hinge

Material: Zinc alloy / Plastic

Finsih: Nickel

Available for : Up-turning wooden door and aluminum-frame door

Function: Supporting cabinet doors

Features: Hi-tech processing technology and surface electroplating

High density zinc alloy cast part

Hi-tech hydraulic make it silent on travelling

阻尼支撑

主要材質: 鋅合金/塑料

表面處理: 鍍鎳

適用範圍: 櫥櫃的上翻木門和鋁框門


主要功能: 支撐櫥櫃門板

產品特性: 高密度鋅合金壓鑄成形


高技術的電鍍并經封閉的表面處理

高技術油壓真空處理技術, 行程靜音

FD-B09-U	Up lifting 上翻	
FD-B09-D	Down lifting 下翻	
FD-B09-SU	Up lifting(short) 上翻(短)	
FD-B09-SD	Down lifting(short) 下翻(短)	

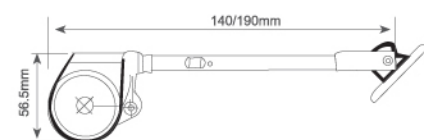

Installation indication 安裝孔位示意圖

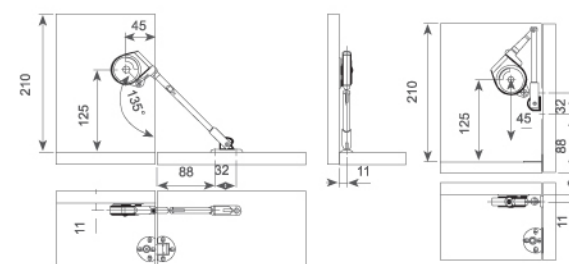

Flap stay

Material: Zinc alloy+steel

Finsih: Nickel

Capacity: Light:3-4kg/Pcs

Heavy duty:5-6kg/Pcs

Available: Up-turning wooden door for kitchen

隨意停支撑

材質: 鋅合金+鐵

表面處理: 鍍鎳


承重: 輕型3-4kg/只

重型5-6kg/只


適用範圍: 櫥櫃的上翻木門

FD-B10-L	Light 輕型	
FD-B10-H	Heavy duty 重型	

可使用門尺寸 Possible Door Sizes

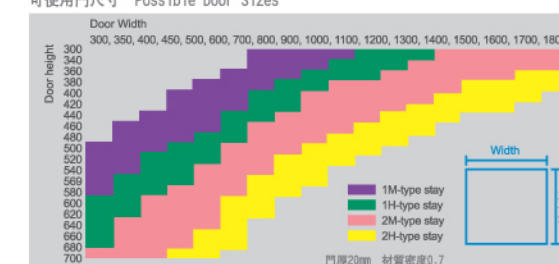

Installation indication 安裝孔位示意圖

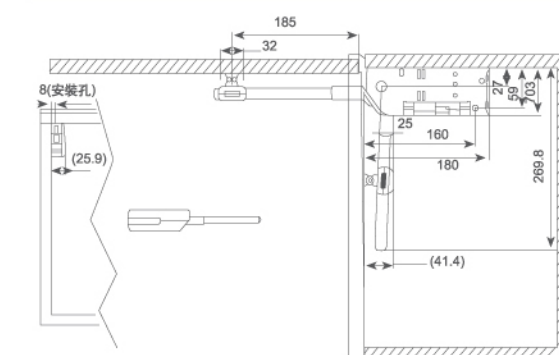

荣易
ROE'ASY

Lift-up Flap Support
FD-G10 氣動垂直上翻支撐




Lift-up Flap Support

Material: Zinc alloy + Iron +Plastic
Finsih: Nickel;Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology

氣動垂直上翻支撐


主要材質: 鋅合金+鐵+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保

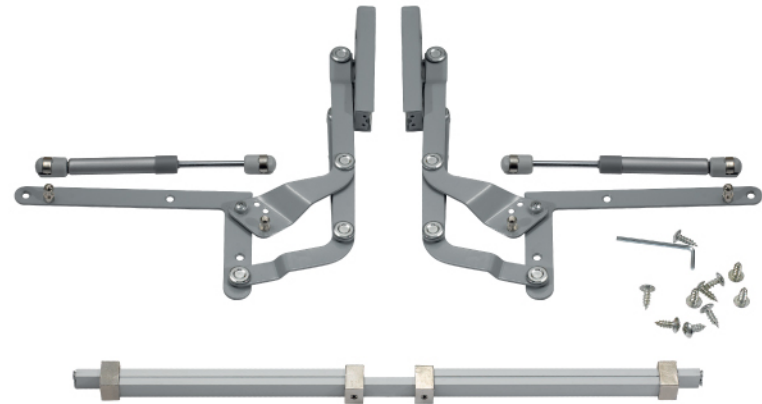

FD-G10-S	600-900mm	
FD-G10-L	900-1200mm	
FD-G10-SC	緩衝 Soft-closing	

前板最大高度 Maximum height of front panel	前板最小高度 Minimum height of front panel	前板舉起高度 Lifting height of front panel	氣彈數和常規舉力 Number of pneumatic spring and nominal force	前板重量 Weight of front panel
380	330	375mm	2x150N	2.5-3.5KG
380	330	375mm	2x200N	3-5KG
380	330	375mm	2x250N	4-6KG
380	330	375mm	2x300N	6-8KG

Installation indication 安裝孔位示意圖

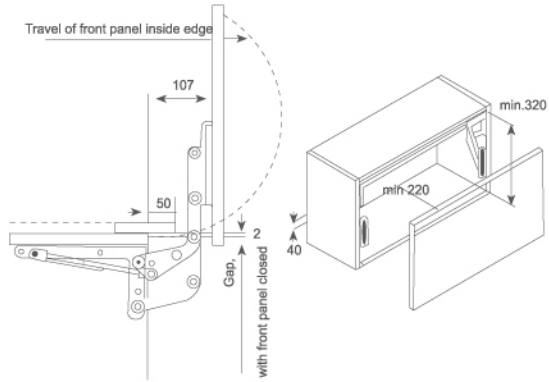

荣易
ROE'ASY

Lift-up Flap Support
FD-G20 氣動上翻支撐



Lift-up Flap Support

Material: Zinc alloy + Aluminium alloy +Plastic
Finsih: Nickel;Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology

氣動上翻支撐


主要材質: 鋅合金+鋁合金+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保

FD-G20	Lift-up Flap Support 氣動上翻支撐	
---------------	-----------------------------	--

型號 Model	最大門高 Max height open(mm)	櫃體內高 Internal cabinet height(kg)	最大載重 Max load(kg)
FD-G20(360)	360	312-342	18
FD-G20(390)	390	342-372	18
FD-G20(440)	440	372-402	18

型號 Model	長度 Length(mm)	可調尺寸 Adjustable measuro(mm)
FD-G20-600	600	310-600
FD-G20-900	900	610-900
FD-G20-1200	1200	910-1200
FD-G20-1500	1500	1210-1500
FD-G20-1800	1800	1510-1800

Installation indication 安裝孔位示意圖

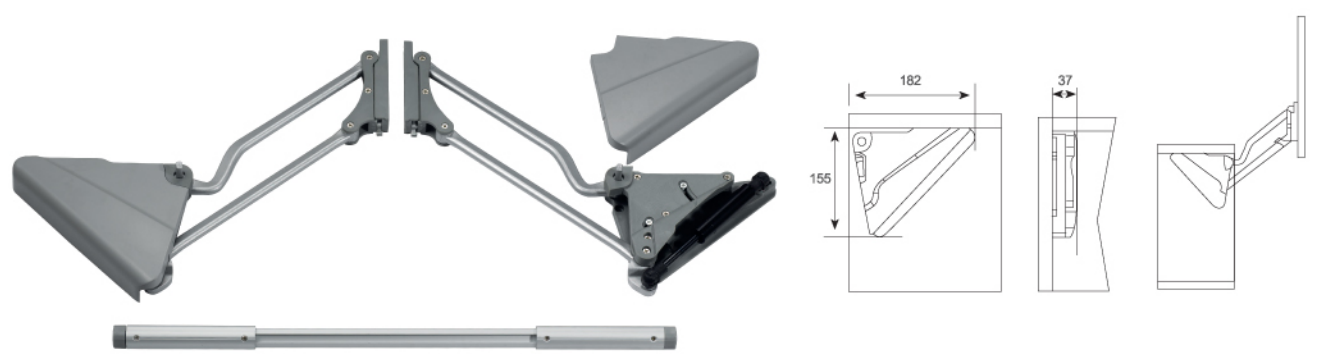



Lift-up Flap Support

Material: Zinc alloy + Aluminium alloy +Plastic
Finsih: Nickel;Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology

氣動斜開支撐

主要材質: 鋅合金+鋁合金+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保


FD-G21 Lift-up Flap Support 氣動斜開支撐

型號 Model	最大門高 Max height open(mm)	櫃體內高 Internal cabinet height(kg)	最大載重 Max load(kg)
FD-G21(720)	720	372-720	16

調節杆技術參數 Adjustable bar technical parameters

型號 Model	長度 Length(mm)	可調尺寸 Adjustable measurc(mm)
FD-G21-600	600	310-600
FD-G21-900	900	610-900
FD-G21-1200	1200	910-1200
FD-G21-1500	1500	1210-1500
FD-G21-1800	1800	1510-1800

Installation indication 安裝孔位示意圖

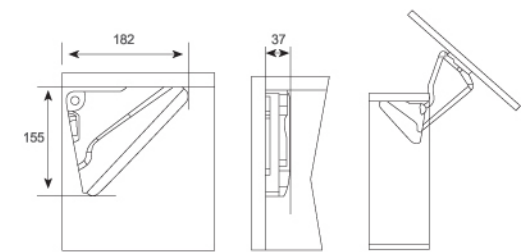

Bi-fold Lift System


Material: Zinc alloy + Iron +Plastic
Finsih: Nickel;Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology

氣動折疊上翻支撐

主要材質: 鋅合金+鐵+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保

FD-G30 Bi-fold Lift System 氣動折疊上翻門支撐

Installation indication 安裝孔位示意圖

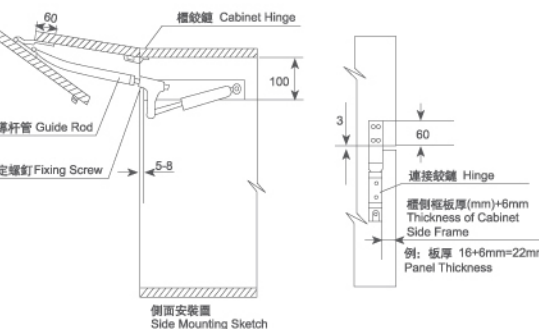



Bi-fold Lift System

Material: Zinc alloy + Iron +Plastic
Finsih: Nickel;Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology

氣動折疊上翻支撐


主要材質: 鋅合金+鐵+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保



FD-G60 Bi-fold Lift System 氣動折疊上翻門支撐

門高 Door Height	A	B	C	D
340	112	232-s	225	50
350	100	242-s	230	45
360	87	253-s	235	35

Installation indication 安裝孔位示意圖

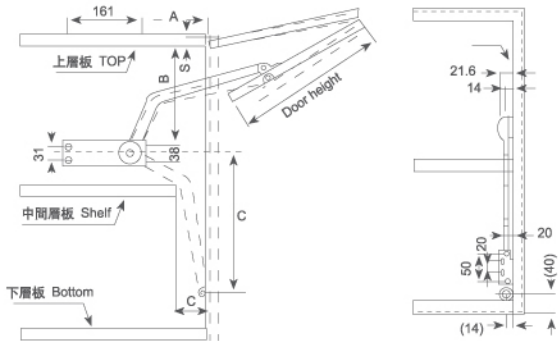


Bi-fold Lift System

Material: Zinc alloy + Iron +Plastic
Finsih: Nickel;Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology


氣動垂直上翻支撐

主要材質: 鋅合金+鐵+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保

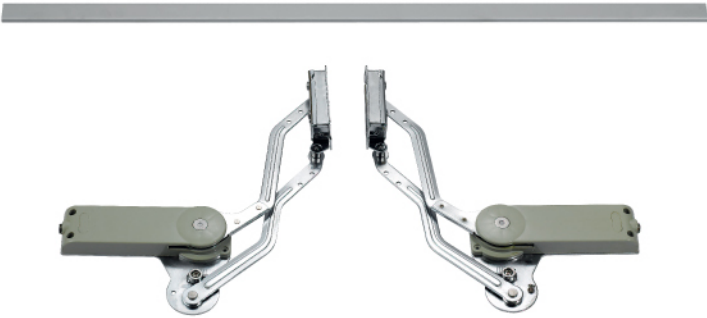

FD-G70 Bi-fold Lift System 氣動垂直上翻支撐

Installation indication 安裝孔位示意圖

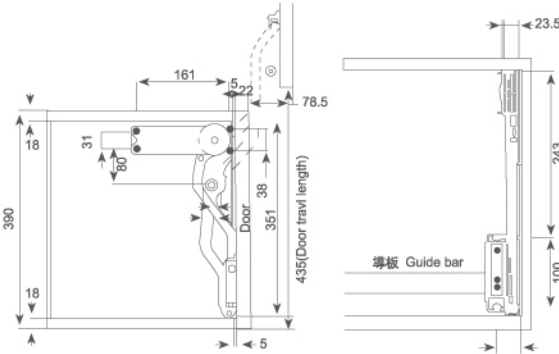



Bi-fold Lift System

Material: Zinc alloy + Iron +Plastic
Finsih: Nickel;Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology

氣動垂直上翻支撐

主要材質: 鋅合金+鐵+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保




FD-G80-U Up lifting 上翻

Range of application 適用範圍

前板最大高度 Maximum height of front panel	前板最小高度 Minimum height of front panel	前板舉起高度 Lifting height of front panel	氣撐數和常規舉力 Number of pneumatic spring and nominal force	前板重量 Weight of front panel
380mm	340mm	375mm	2x150N	2.5~3.5kg
380mm	340mm	375mm	2x200N	3~5kg
380mm	340mm	375mm	2x250N	4~6kg
380mm	340mm	375mm	2x300N	6~8kg

Installation indication 安裝孔位示意圖

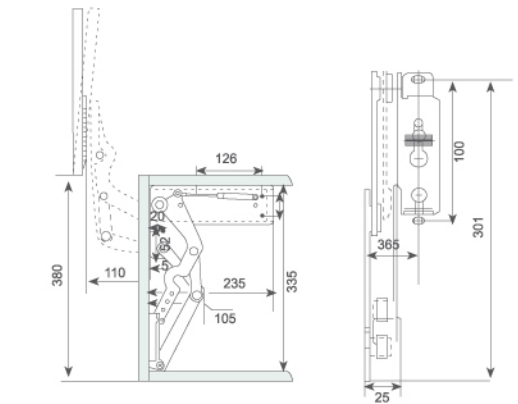


Bi-fold Lift System

Material: Zinc alloy + Iron +Plastic
Finsih: Nickel;Chrome plated
Available for : Down-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology

氣動垂直下翻支撐

主要材質: 鋅合金+鐵+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的下翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保

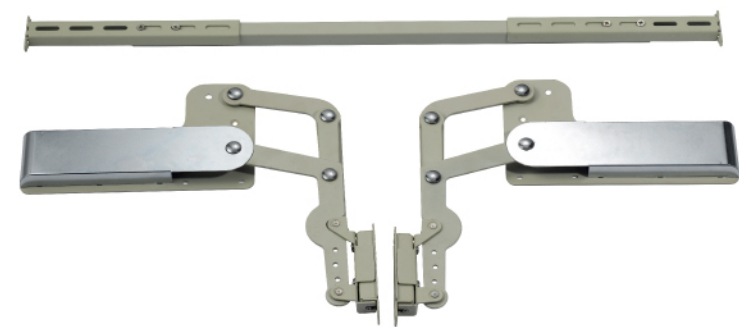


FD-G81-D Down lifting 下翻

Range of application 適用範圍

前板最大高度 Maximum height of front panel	前板最小高度 Minimum height of front panel	前板舉起高度 Lifting height of front panel	氣撐數和常規舉力 Number of pneumatic spring and nominal force	前板重量 Weight of front panel
380mm	340mm	375mm	2x150N	2.5~3.5kg
380mm	340mm	375mm	2x200N	3~5kg
380mm	340mm	375mm	2x250N	4~6kg
380mm	340mm	375mm	2x300N	6~8kg

Installation indication 安裝孔位示意圖

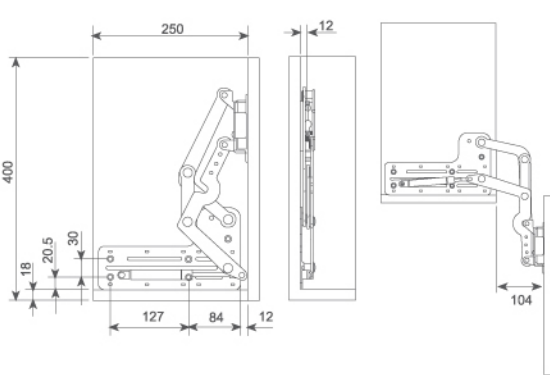



Pocket Door System

Material: Zinc alloy + Iron +Plastic
Finsih: Nickel;Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology

上翻内藏門系統

主要材質: 鋅合金+鐵+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保




FD-G40	Internal 內藏	
--------	-------------	--

門板 Door		(400x700mm)	(400x1000mm)	(400x1200mm)	(400x1500mm)	(400x1800mm)
數量 Yield	產量 Number	3-4kg	5-7kg	6-8kg	7-10kg	10-12kg
高度 Height						
350mm	2	2※	3	3※	4	
400mm	2	2※	3※	3※	4※	
450mm	2	2※	3※	3※	4※	

注: ※為重型 / Note: ※ Is Heavy

Installation indication 安裝孔位示意圖

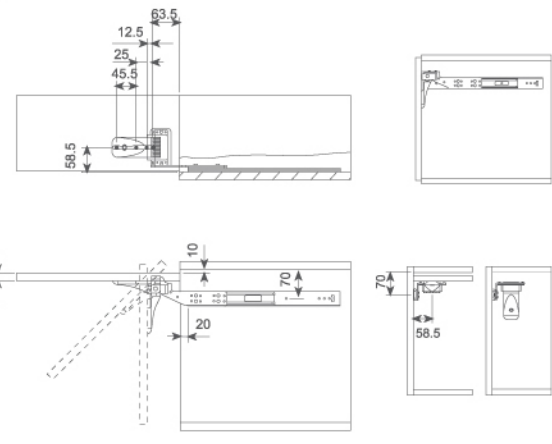

Pocket Door System

Material: Zinc alloy + Iron +Plastic
Finsih: Nickel;Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling
International advanced spray-paint technology

上翻外推門系統

主要材質: 鋅合金+鐵+塑料
表面處理: 鍍鎳、鍍鉻
適用範圍: 櫥櫃的上翻木門和鋁框門
主要功能: 支撐櫥櫃門板
產品特性: 高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音
國際先進噴塗技術，無毒環保




FD-G50	External 外推	
--------	-------------	--

門板 Door	產量 Yield	(400x700mm)	(400x1000mm)	(400x1200mm)	(400x1500mm)	(400x1800mm)
高度 Height	Number	3-4kg	5-7kg	6-8kg	7-10kg	10-12kg
350mm	2	2張	3	3張	4	
400mm	2	2張	3張	3張	4張	
450mm	2	2張	3張	3張	4張	

注: ※為重型 / Note: ※ Is Heavy

Installation indication 安裝孔位示意圖

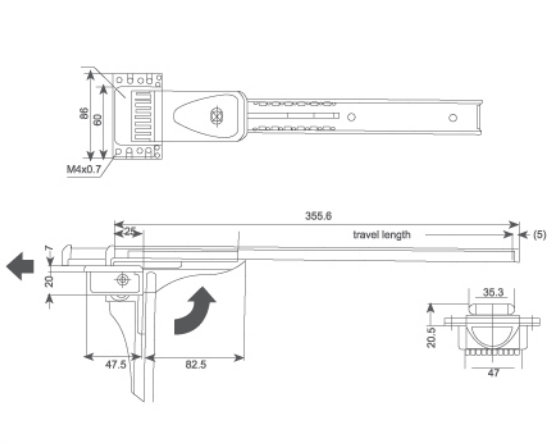

Bi-fold Lift System

Material: Zinc alloy + Iron + Plastic

Finsih: Nickel, Paint

Feature: High quality cold-rolled steel

Hi-tech processing technology and surface electroplating
International advanced spray-paint technology
Hi-tech hydraulic make it silent on travelling



FD-G101


氣動折疊上翻門系統

材質: 鋅合金+鐵+塑料

表面處理: 鍍鎳、噴漆

產品特性: 選用優質進口冷軋鋼板制造

高技術的電鍍并經封閉的表面處理
國際先進噴塗技術, 無毒環保
高技術油壓真空處理技術, 行程靜音

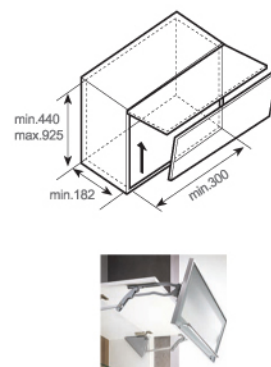

Flap System

Material: Aluminium alloy + Iron + Plastic

Finsih: Nickel, Paint

Feature: High quality cold-rolled steel

Hi-tech processing technology and surface electroplating
International advanced spray-paint technology
Hi-tech hydraulic make it silent on travelling



FD-G102


液壓上翻門系統

材質: 鋅合金+鐵+塑料

表面處理: 鍍鎳、噴漆

產品特性: 選用優質進口冷軋鋼板制造

高技術的電鍍并經封閉的表面處理
國際先進噴塗技術, 無毒環保
高技術油壓真空處理技術, 行程靜音

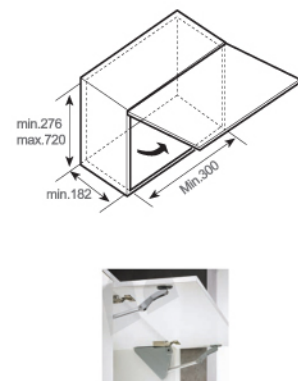


Oblique Sliding Door Hinge

Material: Aluminium alloy + Iron + Plastic

Finsih: Nickel, Paint

Feature: High quality cold-rolled steel

Hi-tech processing technology and surface electroplating
International advanced spray-paint technology
Hi-tech hydraulic make it silent on travelling



FD-G103


斜開移門鉸

材質: 鋅合金+鐵+塑料

表面處理: 鍍鎳、噴漆

產品特性: 選用優質進口冷軋鋼板制造

高技術的電鍍并經封閉的表面處理
國際先進噴塗技術, 無毒環保
高技術油壓真空處理技術, 行程靜音

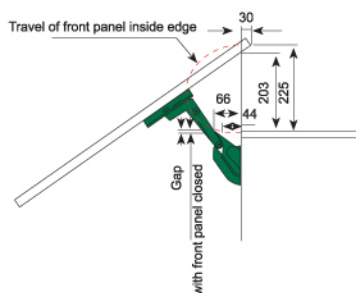

Item no.	Inside	required	max.front
	Width=B	Springs	weight
YFH-002A	600-800mm	2 300N	9.0kg
YFH-002B	800-1000mm	2 350N	11.0kg

Parallel travelling Support

Material: Zinc alloy + Iron + Plastic

Finsih: Nickel, Paint

Feature: High quality cold-rolled steel

Hi-tech processing technology and surface electroplating
International advanced spray-paint technology
Hi-tech hydraulic make it silent on travelling



FD-G104


平移門支撐

材質: 鋅合金+鐵+塑料

表面處理: 鍍鎳、噴漆

產品特性: 選用優質進口冷軋鋼板制造

高技術的電鍍并經封閉的表面處理
國際先進噴塗技術, 無毒環保
高技術油壓真空處理技術, 行程靜音



Parallel travelling Support

Material: Zinc alloy + Iron + Plastic

Finsih: Nickel, Paint

Feature: High quality cold-rolled steel

Hi-tech processing technology and surface electroplating
International advanced spray-paint technology
Hi-tech hydraulic make it silent on travelling



FD-G105


氣動平移門支撐

材質: 鋅合金+鐵+塑料

表面處理: 鍍鎳、噴漆

產品特性: 選用優質進口冷軋鋼板制造

高技術的電鍍并經封閉的表面處理
國際先進噴塗技術, 無毒環保
高技術油壓真空處理技術, 行程靜音



Double Open System

Material: Zinc alloy + Iron + Plastic

Finsih: Nickel, Paint

Feature: High quality cold-rolled steel

Hi-tech processing technology and surface electroplating
International advanced spray-paint technology
Hi-tech hydraulic make it silent on travelling



FD-G106


雙開門系統

材質: 鋅合金+鐵+塑料

表面處理: 鍍鎳、噴漆

產品特性: 選用優質進口冷軋鋼板制造

高技術的電鍍并經封閉的表面處理
國際先進噴塗技術, 無毒環保
高技術油壓真空處理技術, 行程靜音





Heavy-Duty Hydraulic Stay

Material: Zinc alloy / Iron
Finsih: Nickel/Chrome plated
Available for : Up-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
Features: Hi-tech processing technology and surface electroplating
High density zinc alloy cast part
Hi-tech hydraulic make it silent on travelling


重型液壓支撐器

主要材質：鋅合金/鐵
表面處理：鍍鎳、鍍鉻
適用範圍：櫥櫃的上翻木門和鋁框門
主要功能：支撐櫥櫃門板
產品特性：高密度鋅合金壓鑄成形
高技術的電鍍并經封閉的表面處理
高技術油壓真空處理技術，行程靜音

FD-G110 Heavy-Duty Hydraulic Stay 重型液壓支撐器

門板高度 Door Height	最大門板重量 max.flap weight (kg) 開啓角度 Opening angle		
	75°	90°	110°
300	26.2-45.2	20.0-34.8	15.0-25.6
400	19.6-34.8	15.2-26.2	11.2-19.2
500	15.9-27.6	12.1-21.2	8.8-15.7
600	13.0-23.4	10.1-17.4	7.3-13.0
700	11.0-19.4	8.4-14.6	6.4-10.6
800	9.7-17.4	7.5-13.0	5.7-9.5
900	8.8-15.4	6.8-11.5	5.1-8.4
1000	7.9-13.9	5.9-10.4	4.4-7.7

Installation indication 安裝孔位示意圖

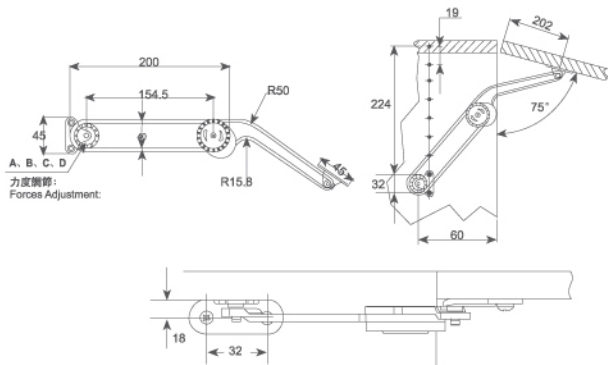

Multifunctional Flap Support(Down Lifting)

Material: Iron
Finsih: Zinc plated
Available for : Down-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
International advanced spray-paint technology


多功能機械支撐杆

主要材質：鐵
表面處理：鍍鋅
適用範圍：櫥櫃下翻櫥門
主要功能：支撐櫥櫃門板
採用國際先進噴塗技術，無毒環保，有效防止腐蝕及生鏽

FD-G111 Down Lifting 下翻

FD-G111-S Down Lifting(short) 下翻(短)

Installation indication 安裝孔位示意圖

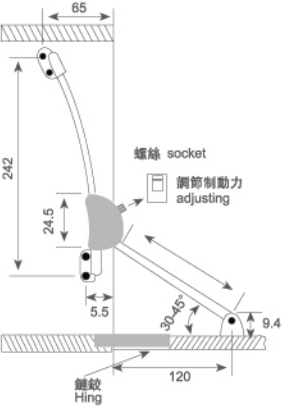



Multifunctional Flap Support(Down Lifting)
Material: Iron
Finsih: Zinc plated
Available for : Down-turning wooden door and aluminu-frame door
Function: Supporting cabinet doors
International advanced spray-paint technology


多功能機械支撐杆
主要材質：鐵
表面處理：鍍鋅
適用範圍：櫥櫃下翻櫃門
主要功能：支撐櫥櫃門板
採用國際先進噴塗技術，無毒環保，有效防止腐蝕及生鏽

FD-G112 Down Lifting 下翻

用直徑為3.5毫米的DIN95/DIN97木螺釘固定
Use Dia 3-5mm DIN95/DIN97 Screws to fix

翻板 內高	Height(mm)	尺寸 X	Size(mm) Y	A	L
300-350	182	100	88	153	
350-400	224	112	119	183	
400-450	252	126	134	203	
450-500	272	138	150	223	
500-550	322	175	184	273	
550-600	372	168	204	283	

Installation indication 安裝孔位示意圖

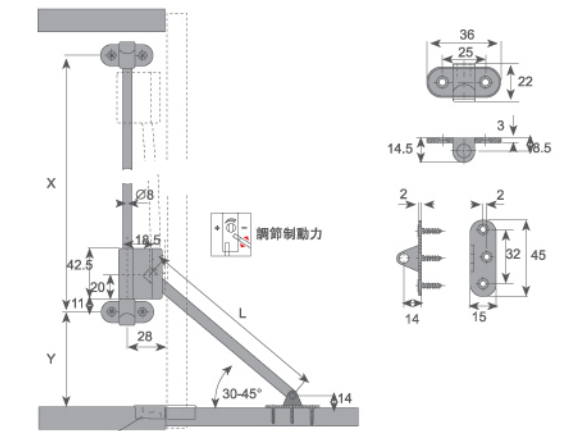


Multifunctional Flap Support(Down Lifting)
Material: Iron
Finsih: Zinc plated
Available for : Down-turning wooden door and aluminum-frame door
Function: Supporting cabinet doors
International advanced spray-paint technology



多功能機械支撐杆
主要材質：鐵
表面處理：鍍鋅
適用範圍：櫥櫃下翻櫃門
主要功能：支撐櫥櫃門板
採用國際先進噴塗技術，無毒環保，有效防止腐蝕及生鏽

FD-G113 Down Lifting 下翻

Installation indication 安裝孔位示意圖

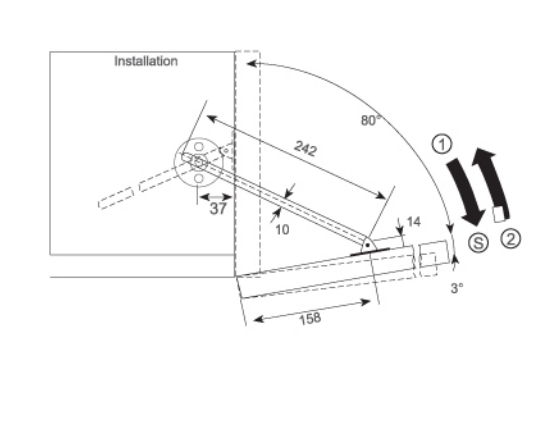

 FD-D114 Multifunctional Flap Support Material: Iron Finish: Zinc plated 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鋅	 FD-D115 Multifunctional Flap Support Material: Iron Finish: Nickel 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鎳
 FD-D116 Multifunctional Flap Support Material: Iron Finish: Gloss 多功能机械支撑杆 材質: 鐵 表面處理: 亮光	 FD-D117 Multifunctional Flap Support Material: Iron Finish: Nickel 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鎳
 FD-D118 Multifunctional Flap Support Material: Iron Finish: Nickel 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鎳	 FD-D119 Multifunctional Flap Support Material: Iron Finish: Zinc plated 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鋅
 FD-D123 Multifunctional Flap Support Material: Iron Finish: Zinc plated, Nickel 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鋅, 鍍鎳	 FD-D124 Multifunctional Flap Support Material: Iron Finish: Nickel 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鎳

 FD-D122 Multifunctional Flap Support Material: Iron Finish: Nickel plated / Paint 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鎳, 塗漆	 FD-D120 Multifunctional Flap Support Material: Iron Finish: Zinc plated 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鋅
 FD-D121 Multifunctional Flap Support Material: Iron Finish: Zinc plated 多功能机械支撑杆 材質: 鐵 表面處理: 鍍鋅	 FD-D125 Multifunctional Flap Support Material: Iron Finish: White Grey 多功能机械支撑杆 材料: 鐵 表面處理: 白色
 FD-D126 Multifunctional Flap Support Material: Iron Finish: White 多功能机械支撑杆 材料: 鐵 表面處理: 白色	 FD-D127 Multifunctional Flap Support Material: Iron Finish: White 多功能机械支撑杆 材料: 鐵 表面處理: 白色
 FD-D128 Multifunctional Flap Support Material: Iron Finish: White Grey 多功能机械支撑杆 材料: 鐵 表面處理: 白色, 灰色	 FD-D129 Multifunctional Flap Support Material: Iron Finish: White 多功能机械支撑杆 材料: 鐵 表面處理: 白色